


Vertical Press Machine VP6T

Standard Features:

- 1 Hydraulic Power Unit 4 GPM Submerged Pump
- 2 External Pressure Adjust to 1500 PSI
- 3 Dual Palm Anti-Tie Down Cycle Start
- 4 Custom Tooling Options
 - Manual Clamping
 - Automatic Clamping
 - Vacuum Clamping
 - Quick Change
 - Electronic Fixture Identification
 - Part Presence Sensing
- 5 Tubular Steel Framework
- 6 10 Micron Hydraulic Filter
- 7 6 Ton Capacity Non-Rotating Ram
- 8 Machine Controller
 - Allen Bradley™ Processor
 - Manual Jog Functions
 - Limit Switch Feedback
 - Discrete I/O for machine Sequencing and EFC (Engineering for Conformance)
 - Automatic Press/Retract Cycle Sequencing

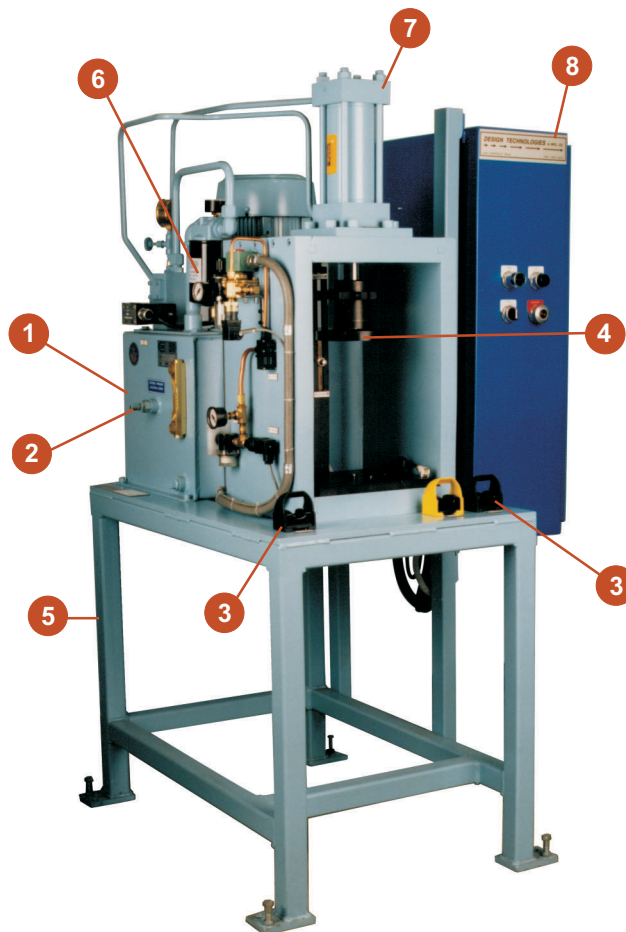

*Options:


- Safety Light Curtain
- Tooling Storage Drawer
- Air Press
- Air-Over-Oil Press
- High Force Multiple Piston Air Press
- Quick-Disconnect Tooling
- Poka-Yoke Tooling
- Press Force Monitoring
- Vacuum Part Holding
- Integrated Automation
- Storage Shelf
- Rapid Advance

**Specifications:


- 460 VAC 3 Phase STD.
- 5 Horsepower
- Press Force: **6 Ton (12,000 lbs) maximum**
- Stroke: **6"**
- Speed
 - Advance: **111 IPM**
 - Retract: **136 IPM**
- Overall Machine Size
 - Height: **65"**
 - Width: **36"**
 - Depth: **36"**
- Work Area
 - Width: **12"**
 - Depth: **36"**
 - Daylight: **14.5"**
- **Warranty (1) Year Parts & Labor**

Please see other side for more pressing solutions.


Additional Pressing Solutions

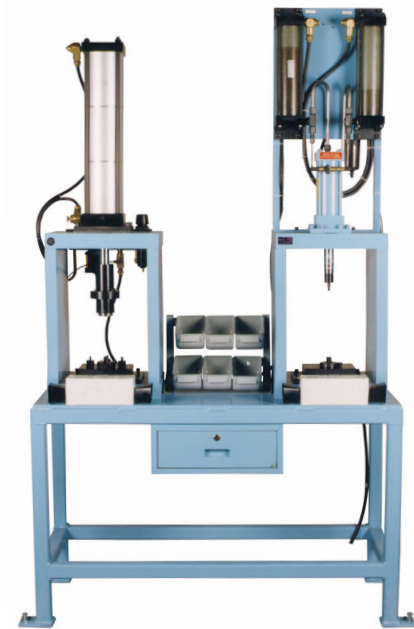

Combination Triple Piston High Force Air Press and Smooth Motion Air-over-Oil Assembly Press

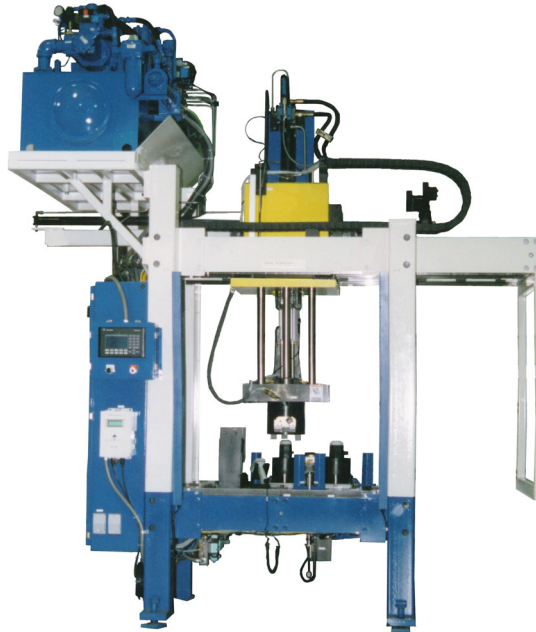

Fully Automatic Hydraulic Servo Controlled Assembly Press with Barcode ID , automated part gaging, and Force press monitoring

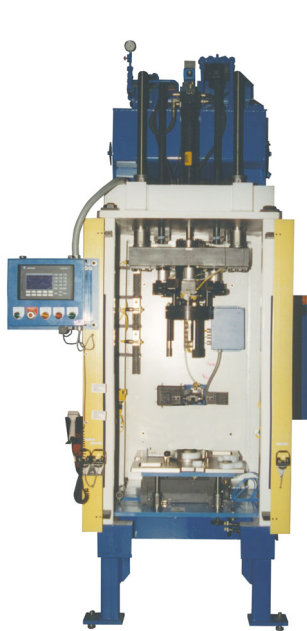

10 Ton Automated Assembly Line Press with Press Force Monitoring and Barcode Reader



4 Post Hydraulic Broaching Die Set Press with 12 Position Dial Table

Engineering & Design • Special Machinery • Robotic Systems • CNC Machining • Welding Specialist • Custom Fabricating

DESIGN TECHNOLOGIES & MFG. CO.

2000 Corporate Drive • Troy, Ohio 45373 • ph. 937-335-1950 • fax 937-339-2961 • email: sales@destechmfg.com

<http://www.destechmfg.com>

Call 1-800-365-2303